

# **NEW B1200G-2**

# **SKOPE Standard Range**

## **GENERAL PURPOSE**

This chiller will enhance product display and merchandising in any café, supermarket or convenience store while making significant power savings.

Optional illuminated sign panel

Fitted with LED lights to minimise energy consumption

High efficiency, high speed EC condenser fan motor with a reverse function to reduce condenser cleaning frequency

Fully removable electronically controlled cassette for easy servicing and transportation

Self-closing doors with double glazed, double Low-E, argon filled, toughened safety glass

Plumbing free design with built in evaporator tray for efficient disposal of condensate water

✓ Automatic energy saving mode during store closing times and quiet periods

Lockable swivel castors for easy installation, positioning and relocation

Freephone 1800 121 535 or visit www.skope.com.au

### **Specifications**



#### B1200G-2

#### SKOPE Two Door Vertical Chiller

# Double glazed, swing doors

#### **Cabinet Dimensions**

 External
 Internal

 Height
 2195mm
 1454mm


 Width
 1280m
 1180mm

 Depth
 808mm
 602mm

Floor area 1.03m2

(includes 50mm stand-off)

Insulation 50mm polyurethane foam

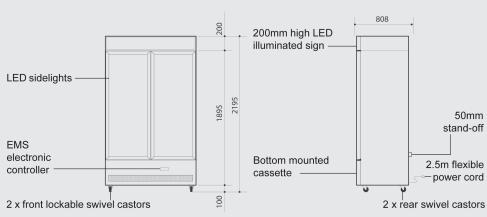

#### **Cabinet Specifications**

**Refrigeration system** Cassette

Electronic Controller EMS Electronic Controller

RefrigerantR134a / 570 gNominal capacity900 WattsCabinet internal volume1120 litres

Cabinet temperature range +2°C to +4°C in 40°C ambient

**Drainage** No plumbing required

Electrical220-240 Volts a.c. 50 Hz, single phase supply, 4.3 AmpsInternal lighting2 x sidelights: 19 Watt T8 LED tube (Ø26 x 1200mm)Sign illumination1 x sign light: 22 Watt T8 LED tube (Ø26 x 1200mm)Internal door opening size2 door openings: 1454mm high x 525mm wide

**Doors** Self-closing doors with double glazed, double Low-E, argon filled, toughened safety glass

Shelves 4 layers of adjustable height wire shelves (1 per door) +

1 bottom layer of fixed in place, stainless steel trays (1 per door)



