



High Efficiency & Compliant

Rigorously tested in independent certified laboratories.



High Quality

Products ensuring longevity performance.



European Design & Manufacture

Customised for the Australian market and rugged conditions.



Affordability

Excellent value for money.


FROZEN CHEST - SELF CONTAINED



ICE plug in



The above image is for model display purpose only and actual product or specification may vary.

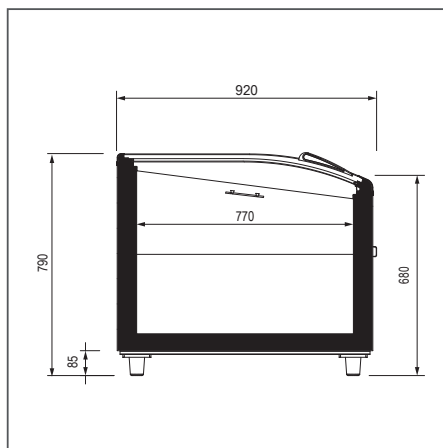

ARK

Temperature Range: L1 (-15/ -18°C)



Features

External Colour: Black
Internal Colour: White
Sling curved panoramic lids
Adjustable internal wire grids
High efficient LED internal lighting

Grey bumper rail
Danfoss electronic controller
Maintenance free condenser
Automatic evaporation

Specifications		ARK 15	ARK 20	ARK 25
Dimensions	mm	1520 x 920 x 790	2020 x 920 x 790	2500 x 920 x 790
Power Supply Required	A	10	10	10
Volume	litres	400	580	750
Wire Dividers		4	5	6
MEPS Power Consumption	kwh/24h	6,70	7,58	8,20
Refrigerant Type		R134a		
Installation		230V / 50Hz		
Nominal Power	W	374	418	435
Climatic Class		Class 3 (+25 °C / 60% RH)		
Warranty		12 Months (parts)		
Packaging Dimensions	mm	1610 x 1020 x 850	2110 x 1020 x 850	2610 x 1020 x 850
Weight with packing	kg	129	161	193