



### High Efficiency & Compliant

Rigorously tested in independent certified laboratories.



### High Quality

Products ensuring longevity performance.



### European Design & Manufacture


Customised for the Australian market and rugged conditions.



### Affordability

Excellent value for money.

## FROZEN GLASS DOORS - SELF CONTAINED

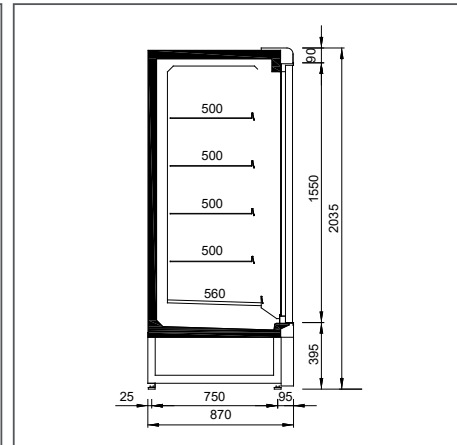

The above image is for model display purpose only and actual product or specification may vary.

### DN

Temperature Range: L1 (-15/ -18°C)



### Features

- External Colour: Black
- Internal Colour: Black
- Black coated aluminium doors
- Heated glass doors with antifog internal film
- 4 rows of 500mm shelving with balck ticket strip
- Vertical LED lighting
- Ventilated refrigeration system with high efficiency fans
- Evaporator fan guards
- Electric defrost
- Carel electronic controller
- Condensing unit with high efficiency fans
- Automatic evaporation
- Castors
- Solid end panels

Specifications		DN-20	DN-30	DN-40
Dimensions	mm	1334 x 870 x 2035	1959 x 870 x 2035	2584 x 870 x 2035
Power Supply Required	A	10	15	15
Volume	litres	953	1429	1905
Shelves	mm	4 x 500	4 x 500	4 x 500
MEPS Power Consumption	kwh/24h	28,64	38,09	52,05
Refrigerant Type		R404a		
Installation		230V / 50Hz		
Nominal Power	W	1227	1789	2321
Climatic Class		Class 3 (+25 °C / 60% RH)		
Warranty		12 Months (parts)		
Packaging Dimensions	mm	1420 x 955 x 2170	2045 x 955 x 2170	2670 x 955 x 2170
Weight with packing	kg	390	550	750

\* End panels assembled