



High Efficiency & Compliant

Rigorously tested in independent certified laboratories.



High Quality

Products ensuring longevity performance.



European Design & Manufacture

Customised for the Australian market and rugged conditions.




Affordability

Excellent value for money.

DUAL TEMPERATURE ISLAND - SELF CONTAINED



ICE plug in

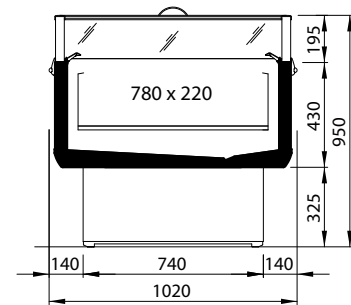

The above image is for model display purpose only and actual product or specification may vary.

IDN-B

Temperature Range: L1 (-15/-18°C) M2 (-1/+7°C)



Features

External Colour: Black

Internal Colour: Black

Black adjustable exposition grids

Sliding flat lids

Ticket rail

Ventilated refrigeration system with high efficiency fans

Evaporators fan guards

Natural defrost

Black rubber bumper rail

Carel electronic controller

Condensing unit with high efficiency fans

Automatic evaporation

Castors

Specifications		IDN-15B	IDN-20B	IDN-25B
Dimensions	mm	1565 x 1020 x 950	2040 x 1020 x 950	2550 x 1020 x 950
Power Supply Required	A	10	15	15
Volume	litres	315	420	525
Shelves	mm	N/A	N/A	N/A
MEPS Power Consumption	kwh/24h	11,29 / 27,24	13,31 / 29,14	15,90 / 39,97
Refrigerant Type			R404a	
Installation			230V / 50Hz	
Nominal Power	W	957 / 1139	1084 / 1204	1238 / 1660
Climatic Class			Class 3 (+25 °C / 60% RH)	
Warranty			12 Months (parts)	
Packaging Dimensions	mm	1600 x 1090 x 1240	2070 x 1090 x 1240	2680 x 1090 x 1240
Weight with packing	kg	260	269	340

* Figures are approximate