



High Efficiency & Compliant

Rigorously tested in independent certified laboratories.



High Quality

Products ensuring longevity performance.



European Design & Manufacture


Customised for the Australian market and rugged conditions.



Affordability

Excellent value for money.

LOW MULTIDECK - SELF CONTAINED

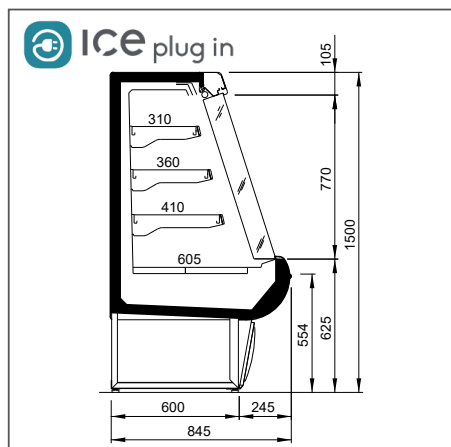

The above image is for model display purpose only and actual product or specification may vary.

SG

Temperature Range: M2 (-1/+7°C)



Features

3 Rows of 300/350/400 mm shelving
Panoramic ends
High efficient 24V LED canopy lighting
LED lighting
Slow release manual night blind

Display front
High efficiency fans with fan guard
Carel electronic controller
Condensing unit
Castors

Specifications		SG-10	SG-14	SG-19
Dimensions	mm	980 x 845 x 1500	1330 x 845 x 1500	1880 x 845 x 1500
Power Supply Required	A	10	10	10
Volume	litres	228	400	576
Shelves	mm	300 / 350 / 400	300 / 350 / 400	300 / 350 / 400
MEPS Power Consumption	kwh/24h	14,76	19,88	28,09
Refrigerant Type		R404a		
Installation		230V / 50Hz		
Nominal Power	W	1306	1460	1719
Climatic Class		Class 3 (+25 °C / 60% RH)		
Warranty		12 Months (parts)		
Packaging Dimensions	mm	1120 x 920 x 1645	1470 x 920 x 1645	2020 x 920 x 1645
Weight with packing	kg	140	164	233

* End panels assembled